


Cisco SLM2008 8-Port Gigabit Smart Switch: PD/AC Power Cisco Small Business Smart Switches

Cost-Effective Gigabit Switching with Entry-Level Management

Highlights

- 8 Gigabit Ethernet ports; ideal for small workgroups moving large files
- Can obtain power from a standard 802.3af PoE switch or from an external AC power outlet
- Entry-level management at a cost-effective price point
- Easy-to-use web browser interface makes installation quick and easy

Figure 1. Cisco SLM2008 8-Port Gigabit Smart Switch

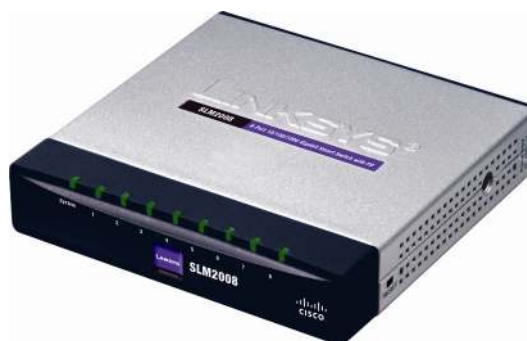

Product Overview

Cisco® Small Business Smart Switches deliver cost-effective switching solutions that are ideal for small businesses or workgroups within larger organizations. These high-speed switches offer entry-level management without the cost and complexity of a full Layer 2 managed switch.

The Cisco SLM2008 8-Port Gigabit Smart Switch (Figure 1) is ideal for conference rooms, labs, shipping/receiving departments or in marketing, design, or audio/visual workgroups. The eight 10/100/1000-Mbps (Gigabit Ethernet) ports enable companies to link to other Gigabit devices on the network (servers, workstations, and network storage) to quickly move bandwidth-intensive files while still supporting 10/100-Mbps clients.

The Cisco SLM2008 supports the IEEE 802.3af standard for Power over Ethernet (PoE) for obtaining its power over a designated powered device (PD) switch port or from an external AC power adapter. This gives companies the option to install the switch in places where a power outlet may not be present, such as in ceilings and walls.

The Cisco SLM2008 is able to secure the network through IEEE 802.1Q VLANs and IEEE 802.1X port authentication. For environments where IP multicast applications are used, the switch is capable of limiting the traffic to only the ports that have requested that traffic, with support of Internet Group Management Protocol (IGMP) snooping. Additional quality-of-service (QoS) capabilities, such as IEEE 802.1p, differentiated services code point (DSCP), and four hardware

queues, make it possible to maintain good quality for real-time applications such as voice and video. The Cisco SLM2008 offers an easy-to-use browser interface for managing and configuring the features, making it ideal for small businesses without an IT staff or that have minimal technical expertise.

Features

- Eight 10/100/1000 Gigabit Ethernet ports
- 16 Gbps, nonblocking, store-and-forward switching capacity
- Supports IEEE 802.3af PoE-PD on port 1 as an optional power supply
- Simplified QoS management using 802.1p and DSCP traffic prioritization specifications
- WebSmart management enables configuration and monitoring from a standard web browser
- 802.1Q-based VLANs enable segmentation of networks for improved performance and security
- Port-level security via 802.1X authentication
- Increased bandwidth and added link redundancy with Link Aggregation Control Protocol (LACP)
- Storm control on multicast and broadcast traffic
- Many-to-one port mirroring for noninvasive monitoring of switch traffic
- Jumbo frame support (9 KB)
- Support for simple interface counters

Specifications

Table 1 gives the specifications, package contents, and minimum requirements for the Cisco SLM2008 8-Port Gigabit Smart Switch.

Table 1. Specifications for the Cisco SLM2008 8-Port Gigabit Smart Switch

Specifications	
Ports	<ul style="list-style-type: none"> • 8 RJ-45 connectors for 10BASE-T/100BASE-TX/1000BASE-T • Auto medium dependent interface (MDI) and MDI crossover (MDI-X) • Auto negotiate/manual setting
Buttons	Reset
Cabling type	Unshielded twisted pair (UTP) Category 5 or better for 10BASE-T/100BASE-TX, UTP Category 5e or better for 1000BASE-T
LEDs	Link/Act, System
PoE	
<ul style="list-style-type: none"> • 802.3af PoE-PD compatible on port 1 • Supply system power without an external power adapter 	
Performance	
Switching capacity	16 Gbps, nonblocking
Forwarding rate	11.9 Mpps wire-speed performance
Layer 2	
MAC table size	8000
Number of VLANs	16 active VLANs (4096 range)
VLAN	Port-based and 802.1Q tag-based VLANs
Head-of-line (HOL) blocking	HOL blocking prevention

Management	
Web user interface	Built-in web UI for easy browser-based configuration
Firmware upgrade	Web browser upgrade (HTTP)
Port mirroring	Traffic on a port can be mirrored to another port for analysis with a network analyzer
Other management	
<ul style="list-style-type: none"> • RADIUS • Port mirroring • Dynamic Host Configuration Protocol (DHCP) client • Ping 	
Security	
IEEE 802.1x	802.1x - RADIUS authentication, MD5 encryption
Availability	
Link aggregation	<ul style="list-style-type: none"> • Link aggregation using IEEE 802.3ad LACP • Up to 8 ports in up to 2 groups
Storm control	Broadcast and multicast
Spanning Tree	IEEE 802.1D Spanning Tree
IGMP snooping	IGMP (v1/v2) snooping limits bandwidth-intensive video traffic to only the requestors Supports 16 multicast groups
QoS	
Priority levels	4 hardware queues
Scheduling	Priority queuing and weighted round-robin (WRR)
Class of service	<ul style="list-style-type: none"> • Port based • 802.1p VLAN priority based • IPv4/v6 IP DSCP based
Standards	
<ul style="list-style-type: none"> • 802.3 10BASE-T Ethernet, 802.3u 100BASE-TX Fast Ethernet • 802.3ab 1000BASE-T Gigabit Ethernet, 802.3z Gigabit Ethernet • 802.3x flow control, 802.3ad LACP, 802.3af PoE, 802.1D Spanning Tree Protocol • 802.1Q/p VLAN, 802.1X port access authentication 	
Environmental	
Dimensions W x H x D	5.12 x 1.12 x 5.12 in. (130 x 28.5 x 130 mm)
Weight	0.91 lb (0.42 kg)
Power	External AC power adapter and IEEE 802.3af compatible PoE-PD
Certification	FCC Part 15 Class B, CE Class A, UL, cUL, CE Mark, CB
Operating temperature	32° to 104°F (0° to 40°C)
Storage temperature	-4° to 158°F (-20° to 70°C)
Operating humidity	10% to 90%
Storage humidity	10% to 95%
Package Contents	
<ul style="list-style-type: none"> • Cisco SLM2008 8-Port Gigabit Smart Switch • AC power adapter with power cord • CD with user guide in PDF format • Online registration card 	
Minimum Requirements	
<ul style="list-style-type: none"> • Web-based utility: web browser - Microsoft Internet Explorer (version 6.0 or later), Firefox (version 2.0.0.1 or later) • Category 5 Ethernet network cable • Switch/router with PoE support or PoE injector when used with PoE • Operating system: Windows XP or later 	
Product Warranty	

5-year limited hardware warranty with return to factory replacement and 90-day limited software warranty

Cisco Limited Warranty for Cisco Small Business Series Products

This Cisco Small Business product comes with a 5-year limited hardware warranty with return to factory replacement and a 90-day limited software warranty. In addition, Cisco offers software application updates for bug fixes and telephone technical support at no charge for the first 12 months following the date of purchase. To download software updates, go to:

<http://www.cisco.com/go/smallbiz>.

Product warranty terms and other information applicable to Cisco products are available at

<http://www.cisco.com/go/warranty>.

For More Information

For more information on Cisco Small Business products and solutions, visit:

<http://www.cisco.com/smallbusiness>.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV
Amsterdam, The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

CCDE, CCENT, Cisco Eos, Cisco Lumin, Cisco Nexus, Cisco StadiumVision, Cisco TelePresence, Cisco WebEx, the Cisco logo, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, COVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0809R)